

CP-302

Issued August 2003 • Index No. DC/13

**MIG Welding
Power Source** 

Quick Specs

Industrial/Heavy Industrial Applications

Light Fabrication
Automotive
Furniture
Agricultural
Truck Body/Metal Fabrication
Small Equipment Manufacturing

Processes

MIG (GMAW)
Flux Cored (FCAW)

Input Power 3-Phase Power

Rated Output 300 A at 32 V, 100% Duty Cycle
390 A at 32 V, 60% Duty Cycle

Max. Open-Circuit Voltage 14-44

Weight 332 lb (151 kg)

The Power of Blue.®

CP-302 MIGRunner™ comes complete in one box. See page 4 for details.

Adjustable weld stabilizer (high-low inductance) provides the flexibility to produce the optimal arc characteristics. Use the high stabilizer setting for stainless steel and low setting for mild steel and aluminum.

Solid-state weld contactor provides longevity to match the ultra-durable and reliable reputation of the CP series.

115 VAC duplex receptacle provides 15 amps of auxiliary power.

14-pin receptacle provides quick, direct connection to wire feeders and accessories.

Presetable welding voltage with voltmeter allows you to easily set weld output before welding.

Large analog volt and ammeters for easy viewing.

Power efficient which gives exceptional value and return on your investment.

Simple control panel with just one control adjustment.

Lower panel cover protects output connections from harsh welding environments.



TRUE BLUE
3YR. WARRANTY

Welder/generator is warranted for 3 years, parts and labor.
Original main power rectified parts are warranted for 5 years.

MADE IN USA
APPLETON, WI 



Miller Electric Mfg. Co.
An Illinois Tool Works Company
1635 West Spencer Street
Appleton, WI 54914 USA

International Headquarters
Phone: 920-735-4505
USA FAX: 920-735-4134
Canadian FAX: 920-735-4169
International FAX: 920-735-4125

Web Site
www.MillerWelds.com



Specifications (Subject to change without notice.)



Rated Output	Open-Circuit Voltage	Amps Input at Rated Output, Three-Phase, 60 Hz										Dimensions	Net Weight	
		200 V	220 V	230 V	380 V	400 V	440 V	460 V	520 V	575 V	KVA			KW
300 A at 32 V, 100% Duty Cycle	14-44	38	34.5	33	20	19	17.3	16.5	14.6	13.0	13.1	12.3	H: 30 in (762 mm) including lift eye W: 23 in (585 mm) D: 30-1/2 in (775 mm) including strain relief	332 lb (151 kg)
390 A at 32 V, 60% Duty Cycle		1.1*	1*	.95*	.6*	.55*	.5*	.48*	.43*	.38*	.38*	.32*		


Conforms with NEMA EW 1, "Electric Arc Welding Power Sources", Class I (100).

*While idling.

60 Hz models Certified by Canadian Standards Association.


Control Panel

1. Ammeter
2. Voltmeter
3. Power Switch
4. Pilot Light
5. Preset Indicator Light
6. Voltage Control

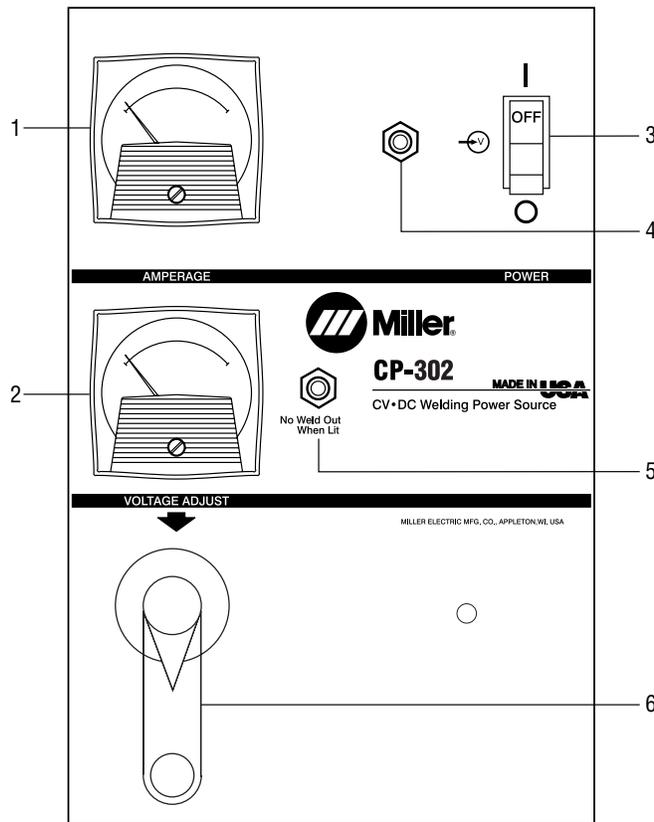


Performance Data

DUTY CYCLE CHART

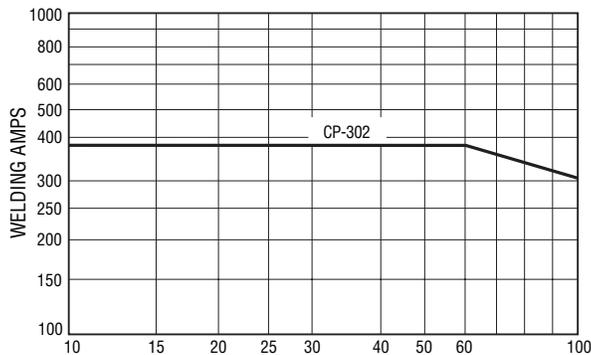

VOLT/AMP CURVE

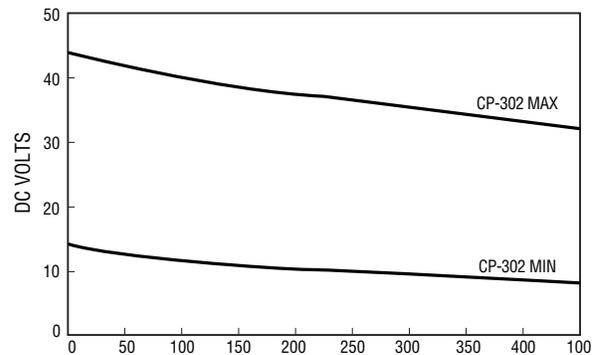

Genuine Miller Accessories



NEW! Industrial MIG Kit #195 197
Includes 15 ft, 2/0 power cable and work lead with clamp, regulator/flow meter with 15 ft gas hose, Roughneck C-4015 MIG gun and consumable kit.



Standard Running Gear #042 886
The large 10 in (254 mm) rear wheels and 5 in (127 mm) front casters on this running gear provide excellent mobility on the shop floor, making it easier to move the power source. Very easy to install. Handles double as weld cable holder.



Note: Both sides lift as shown.

Cylinder Rack/Lift #043 005
Miller's patent pending cylinder rack features a lift which moves the cylinders up onto the rack and into position without manual lifting! The rack accommodates two cylinder bottles, and can be attached directly to the Standard Running Gear.

Standard Cylinder Rack #042 887
Holds two cylinders. Only installs on Standard Running Gear.



Rough Terrain Running Gear #043 043
This two-wheel running gear features pneumatic tires for extra mobility. Handles double as a cable holder.

Wire Feeders



22A #193 066
Lightweight, 24 VAC constant-speed semi-automatic wire feeder, best suited for small diameter wires. Accommodates up to a 60 lb (27.2 kg) spool of welding wire when using optional wire reel assembly. See Lit. Index No. M/11.0.



70 Series
S-74S #195 057
D-74S #195 060
Wire feeder features Posifeed™ wire drive assembly and handles a variety of wires up to 1/8 in. See Lit. Index No. M/3.0.

Extension Cables for 14-Pin Plugs to 14-Pin Sockets
#122 973 25 ft (7.6 m)
#122 974 50 ft (15.2 m)
#122 975 75 ft (22.8 m)



Spoolmatic® 30A #130 831
A 1-lb, air-cooled spool gun that extends the weld process range by adding a handy portable system for small wire MIG. Rated 200 A at 100% duty cycle. Includes 30 ft (9.1 m) cable assembly. (WC-24 #137 549 for 14-pin.)



WC-24 Weld Control #137 549
Packaged in a compact, lightweight, non-metallic enclosure, the WC-24 easily mounts directly on the power source.

It's designed for use with Miller CV power sources supplying 24 VAC and 14-pin receptacles. The control includes a board-mounted potentiometer which can alter the drive motor acceleration rate to optimize arc starting performance.

Coolant Systems

For more information, see Miller Coolant Systems Lit. Index No. AY/7.2.



Coolmate™ 3
#043 007 115 VAC
#043 008 230 VAC
For use with water-cooled torches rated up to 600 amps. Unique paddle-wheel indicator, external filter and easy fill spout.

Coolmate™ V3 #043 009 115 VAC
For use with water-cooled torches rated up to 500 amps. Vertical design conveniently mounts to Miller cylinder rack in place of one cylinder.

Coolmate™ 4 #042 288
For use with water-cooled torches rated up to 600 amps. Tough molded polyethylene case with carrying handle.

Coolant #043 810
Sold in cases of four 1-gallon recyclable plastic bottles.

CP-302 MIGRunner Components

CP-302 MIGRunner™

#907 050 200/230/460 V

#907 073 575 V

Comes Complete With:

- CP-302 power source
- 22A wire feeder
- Roughneck™ C-4015 gun
- .035/.045 in contact tips
- .035/.045 in reversible drive rolls
- Regulator/flow gauge with gas hose
- Work cable and power cord
- Factory-installed running gear/cylinder rack



Ordering Information

Equipment and Options	Stock No.	Description	Qty.	Price
CP-302	#903 786	200/230/460 V, 60 Hz		
	#903 490	380/520 V, 50 Hz		
	#903 489	220/400/440 V, 50 Hz		
	#903 521	575 V, 60 Hz		
CP-302 MIGRunner	#907 050	200/230/460 V, 60 Hz. See above for package components		
	#907 073	575 V, 60 Hz. See above for package components		
Wire Feeders				
22A	#193 066	See Lit. Index No. M/11.0		
70 Series	#195 057	S-74S. See Lit. Index No. M/3.0		
	#195 060	D-74S. See Lit. Index No. M/3.0		
Guns				
Roughneck™ C-Series		See Lit. Index No. AY/17.0		
Liners				
Contact Tips				
Accessories				
NEW! Industrial MIG Kit	#195 197	Includes 15 ft, 2/0 power cable and work lead with clamp, regulator/flow meter with 15 ft gas hose, Roughneck C-4015 MIG gun and consumable kit		
Standard Running Gear	#042 886			
Cylinder Rack/Lift	#043 005			
Standard Cylinder Rack	#042 887			
Rough Terrain Running Gear	#043 043			
Coolant Systems (see page 3)				
Not required for gas/air-cooled systems				

Date:

Total Quoted Price:

Distributed by:

